

4-Rider DynaMESH Intercom  
Intercom Range: Up to 0.8KM  
(.5 mile) per person  
Dual Boomless Microphones

**EXO-COM**  
THE BETTER WAY TO CONNECT  
USER MANUAL



POWERED BY



# EXO-COM


THE BETTER WAY TO CONNECT

## USER MANUAL


### INDEX

<u>PACKAGE CONTENTS</u>	2	<u>INTERCOM GROUP PAIRING SETUP</u>	11
<u>LED INDICATOR</u>	3	<u>INTERCOM CONTROL</u>	12
<u>SPEAKER/MIC INSTALLATION</u>	4	<u>RESET</u>	12
<u>CONTROLLER INSTALLATION</u>	5	<u>INTERCOM PAIRING SETUP (OTHER BRANDS)</u>	
<u>BATTERY INSTALLATION</u>	5	<u>MUSIC SHARING</u>	14-15
<u>WIRE STORAGE</u>	6	<u>BATTERY RECHARGE</u>	15
<u>ACTIVATE PHONE PAIRING</u>	7	<u>VOICE PROMPT LANGUAGE SETTING</u>	16-18
<u>PAIRING EXO-COM TO APP</u>	8	<u>FIRMWARE UPDATE</u>	19-21
<u>BASIC CONTROL</u>	9	<u>UNIVERSAL MOUNT</u>	22
<u>MUSIC</u>	10	<u>UNIVERSAL MOUNT ASSEMBLE</u>	23-24
<u>ACTIVATE SIRI/GOOGLE ASSISTANT</u>	10	<u>IMPORTANT NOTICES &amp; WARRANTY INFORMATION</u>	25-34


## Package Contents

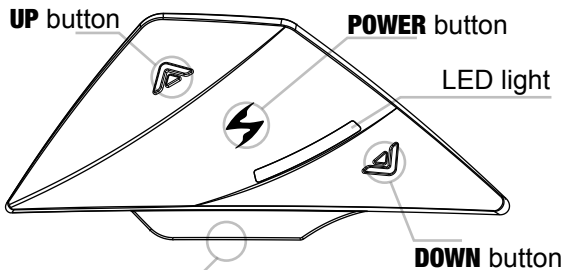

QUICK ACCESS(Google/Siri)



MIC/SPEAKER



BATTERY



USB-C CABLE



VELCRO


(2 x Circular Velcro for Speaker/Mic,  
3 x Capsule Velcro for wire management)



QUICK START GUIDE

- EN, FR, DE, ES, IT

## RETAIL PACKAGE ONLY

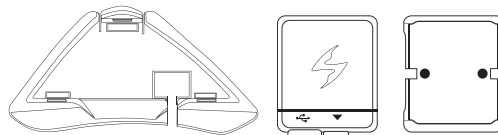


UNIVERSAL MOUNT

Universal mount for EXO-COM controller


Universal mount for EXO-COM battery

## LED Indicator


**BLUE** Blinking - Power on state  
Double Blink - Phone call in progress  
Music Playing

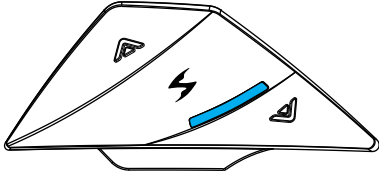


**RED** Blinking - Powering off  
Battery low

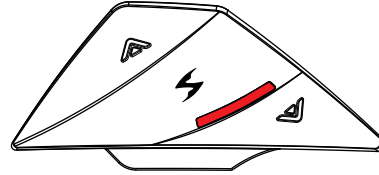


**PURPLE** Blinking - Intercom Pairing Mode

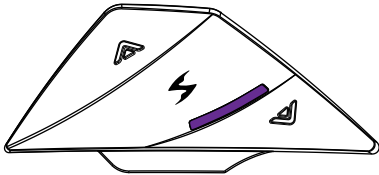


**BLUE/RED** Alternate - Bluetooth phone pairing mode  
Blinking - Music Share Pairing  
- Incoming call

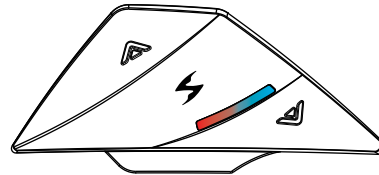

**GREEN** Blinking - Intercom connecteed

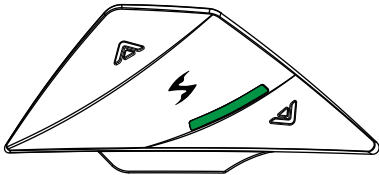

## SPEAKER/MIC Installation

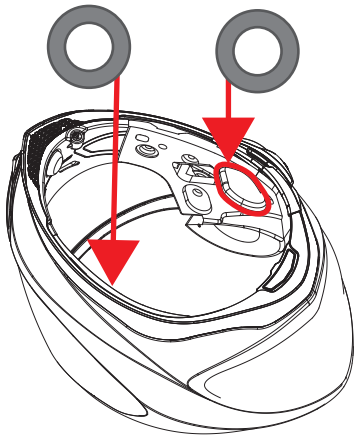

### 1. INSTALLING CIRCLE VELCRO



Circle Velcro may need to be attached to the speaker pockets first to fix the mic/speaker.

- 1) Remove the liner completely referring to previous page.
- 2) Find the speaker pockets on EPS, peel off the sticker

### 2. MIC/SPEAKER INSTALLATION


After the Velcro sits properly on the speaker pocket, peel off the sticker paper on the Fabric (that was paired to Velcro), and attach it to the back of mic/speaker.

Attach the mic/speaker to the Velcro. Make sure the mic is positioned at bottom, and mic hole is facing front (for

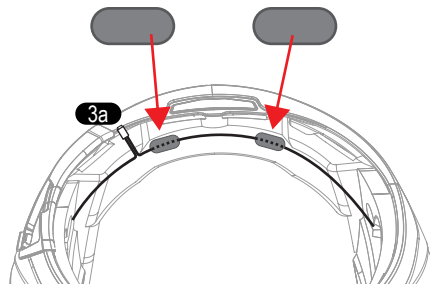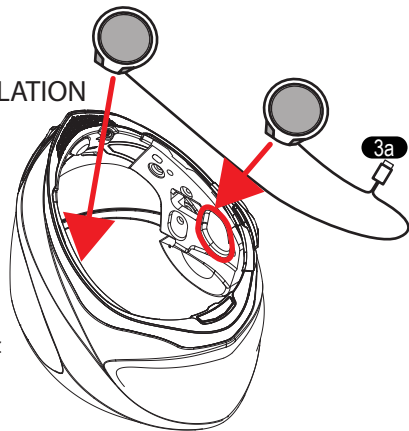

Put the mic/speaker cable on the back of bottom EPS referring to the above picture. You can tidy it up by fixing it with Ellipse Velcro. Make sure the male connector (3a) is properly positioned to be paired with female connector (3A) in

## Controller Installation

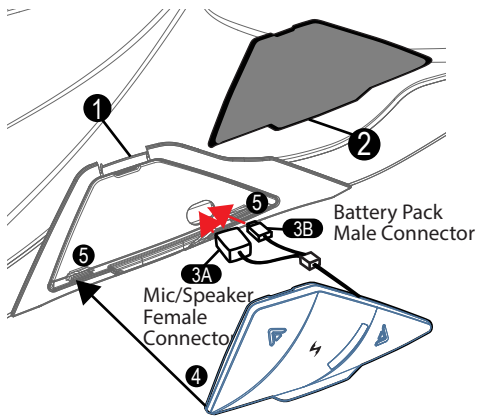


Push up the Locking Lever (1) to remove EXO-COM Controller Cover (2), and put Mic/Speaker Female Connector (3A) into the hole first, and then Battery Pack Male Connector (3B) referring to the above picture.

Install the EXO-COM Controller (4), and make sure it is properly positioned by sitting on two bumps (5) at the bottom.


Connect the mic/speaker's female connector (3A) to its male connector (3a).

## Battery Installation

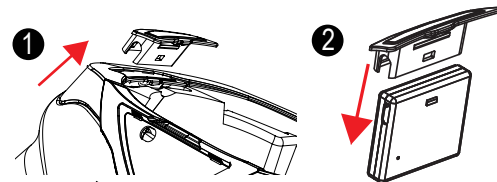


1. Remove the Battery Pack Cover from the back/bottom side of the helmet.

2. Assemble it to the Battery Pack.



3. Plug the Battery Pack male connector (3B) to the Battery Pack referring to the above picture.

## Wire Storage

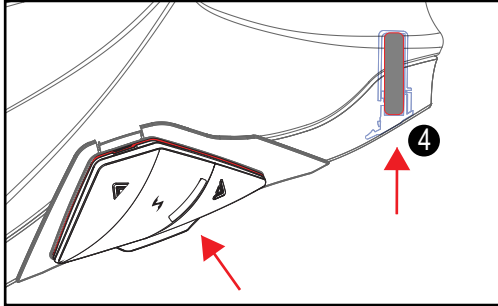


4. Put the Battery Pack back to the slot where the Battery Pack Cover is originally positioned.

Make sure the EXO-COM Controller, the Battery Pack Assembly, Mic/Speaker and its wire are all properly set.

To find detailed information about using the EXO-COM Controller, refer to the EXO-COM Quick Start Guide, or User's Manual by scanning QR code in the EXO-COM Quick Start


**NOTE: WHEN YOU RE-INSTALL THE LINER, CHECK IF ANY PART OF EXO-COM WIRE IS ON THE LINER SNAP HOLE. IT MAY CAUSE WIRE DISCONNECTION IF THE SNAP STRONGLY PUSHES THE WIRE.**

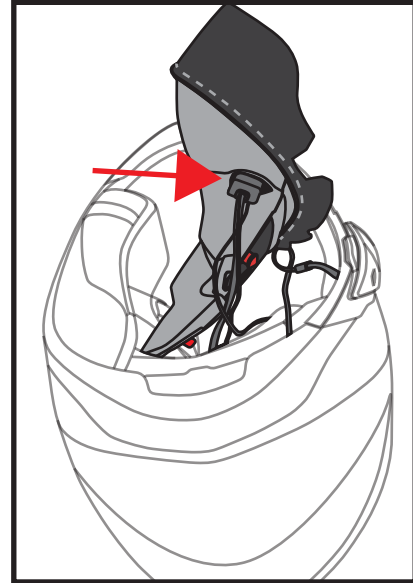

Put the wires into the pocket of left cheek pad. It will help you ride comfortably.

## Activate Phone Pairing

1

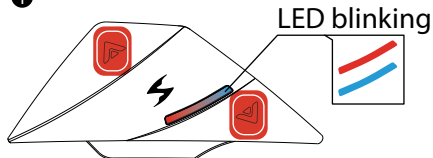

Hold UP+DOWN 2 sec.

2




Find EXO-Com in your phone's Bluetooth device list, and tap the name to pair the device.

3



Once paired, LED turns blue. Device is ready for calls and media streaming.



## ► Pick up Incoming Call



Press POWER once, or just say "Hello"

## ► End / Reject Incoming Call



Hold POWER 2 sec.

## ► Swap Call



Press POWER once

## ► Last Number Redial




Hold POWER+UP 2 sec.



## Pairing EXO-COM to App

(PLEASE COMPLETE PHONE PAIRING FIRST)



1. Turn on the EXO-Com, and pair it to the phone first.
2. Press POWER once.
3. Now it is ready to connect to the app.

### 1 Homepage



### 2 Connect EXO-Com



### 3 Device Information 4 Configuration



## Firmware Update

Easy firmware update: Click update button on EXO-COM app, and follow on-screen instructions.

Firmware update via PC: Visit [www.uclear.eu](http://www.uclear.eu) or [www.ucleardigital.com](http://www.ucleardigital.com) (North America)

## Basic Control



Press



Press Twice



Hold 2 sec.



Hold 5 sec.



Hold until light changes

### On




Hold POWER 2 sec.

### Off




Hold POWER 5 sec.

### Volume Up



Press UP Once

### Volume Down



Press DOWN Once

## Music

### ▶ Play




Press POWER x 2 times

### || Pause



Press POWER once

### ▶▶ Skip track




Press UP x 2 times.

### ◀◀ Backtrack



Press DOWN x 2 times.

## Activate Siri/Google Assistant



Press QUICK ACCESS twice, wait for tone


## Product Support & Manual Download

SCORPIONSPTS.EU (EU)  
SCORPIONUSA.COM (USA)

## Intercom Group Pairing Setup


### The initial setup

1



Power ON Status


2



Press and hold **QUICK ACCESS** for 5 secs until LED blinks purple.


Verify all units to be paired are blinking purple before next step.

3



Press **POWER** on one EXO-COM device to initiate pairing process. The units will blink green once they are connected.

4

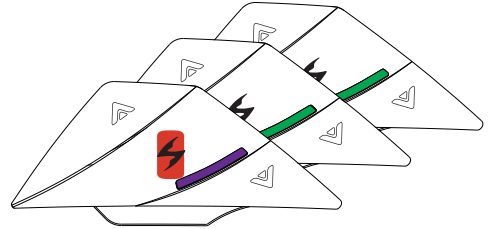


The last unit to pair continues to blink purple for 15 secs before system ends the pairing process.

Optional: Press **POWER** once on the last unit blinking purple to end pairing manually.

## Intercom Control


### After initial setup

#### ► Intercom Connect



Hold UP 2 sec.

#### ► Intercom Disconnect



Hold DOWN 2 sec.


#### ► MICROPHONE MUTE/UNMUTE



Press Power 3 times

## Reset

### Reset

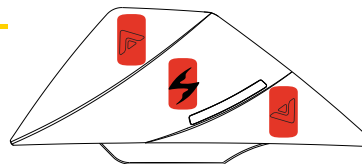

Press UP+POWER+DOWN together once

**NOTE: 3-Button reset is a clearing/reboot process. It will NOT reset your EXO-COM device to factory defaults, or erase settings or pairings.**

To manually reboot EXO-COM devices, use the 3-button reset (does not erase your settings).

Press & hold POWER + UP + DOWN at the same for a few seconds.

Afterwards, power the unit back on. If the unit does not power on, try resetting again while it is plugged into its charger.

*- If you experience further problems, please contact UCLEAR Support.*

If EXO-COM device does not power on after charging or firmware update may be stuck in "update mode".

## Intercom Pairing Setup(Other Brand)

### Intercom Pairing (Other Brand) Setup

1


Set up other brand in "Phone Pairing mode" (please refer to other brand user manual)

2




From OFF MODE,  
Press POWER until LED  
turns to purple  
(about 15 sec.)

3




If the LED is purple, take  
off your hand from the  
device, and wait until  
LED

4




If the LED is green, you are  
successfully connected. If the  
LED is purple, go back  
to step 1.

## 1 DEVICE A

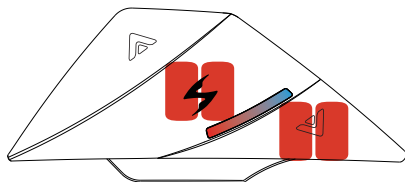


- Power ON state.
- Press Power and Down twice quickly.
- LED indicator will blink blue and red

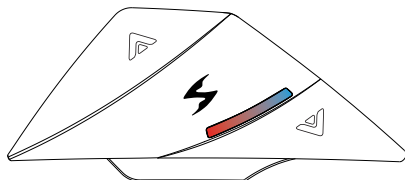


- Primary unit is the device paired to the phone that is playing the music
- Play/pause commands on Primary unit will affect both devices.

## 2 DEVICE B

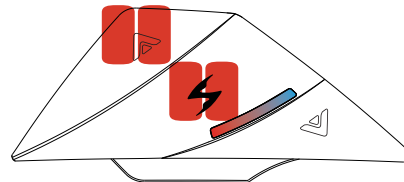


- Power ON state.
- Press Power and Up twice quickly.
- LED indicator will blink blue and red

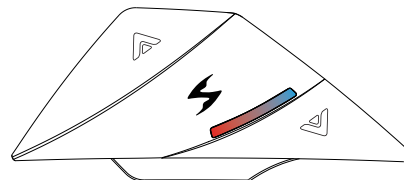

- Secondary unit will receive the music shared by primary unit.
- Play/pause commands on Secondary unit will not affect Primary unit.


### 3 DEVICE A & B

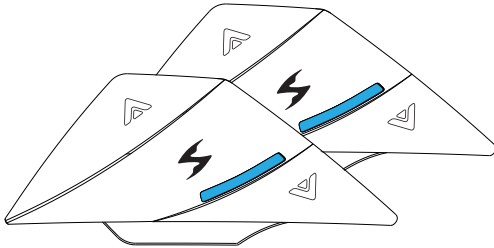

- Both EXO-COM units will start blinking blue when pairing completes.
- Control music playback and volume as shown on 'Music'

Example: Press POWER twice to start music play.  
Press POWER once to pause music.

### Battery Recharge



To charge the battery, we recommend using the USB-C cable included into the package.

LED turns red while charging.  
LED turns blue when fully charged.



## Voice Prompt Language Setting

7 Languages are prepared :

- English, French, German, Spanish, Italian, Chinese, Korean

English and French are default setting.

If you need to change the voice prompt setting, you can change it via PC or APP(iOS, Android)

2-3 min. via PC update  
10 min. via App(Android)  
4 hrs. via App(Apple iOS)

- We recommend using PC or Android rather than Apple iOS as Apple iOS only supports a slow BLE data transmission.

### ① Select CONFIGURATION



### ② Select VOICE PROMPT




### 3 Select Language



### 5 Confirm download



### 6 Download and Firmware Update

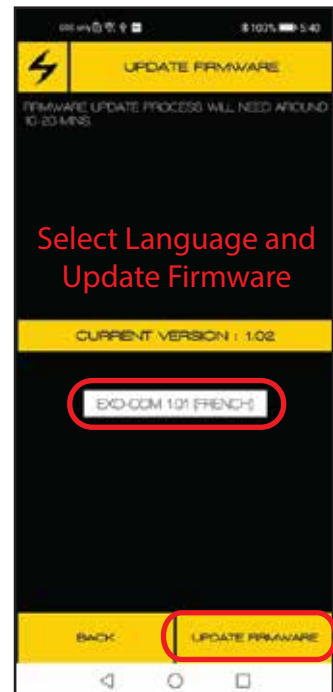

Select Language and Update Firmware

## 7 Update Firmware



## 8 Upgrade the language and Reboot



## 9 Complete the update



## Firmware Update

### Firmware Update can be done via

Method 1. EXO-COM Mobile App

Method 2. PC or Mac

2-3 min. via PC update


10 min. via App(Android)

4 hrs. via App(Apple iOS)

We recommend using PC or Android rather than Apple iOS as Apple iOS only supports a slow BLE data transmission.

### METHOD 1

### Firmware Update via Android/Apple iOS

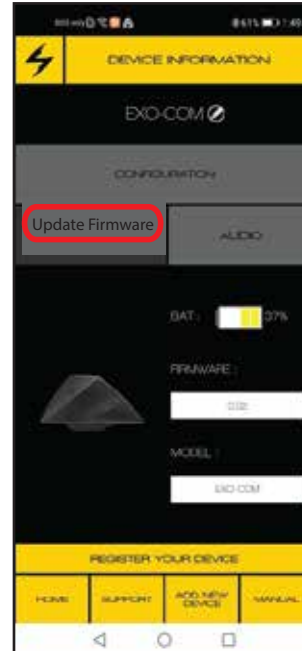


Connect device to EXO-COM Mobile App as shown on pages 7-8. Tap 'UPDATE FIRMWARE' and follow on-screen instructions.

# Firmware Update

## METHOD 2

### Firmware Update via PC or Mac




1. Press all three front buttons simultaneously to reset the EXO-COM unit. The LED will switch off during this reset.




2. After releasing the three buttons, **IMMEDIATELY** press and hold the power button for about three seconds until the LED goes off again.

The LED is off, and EXO-COM is now in the update mode.

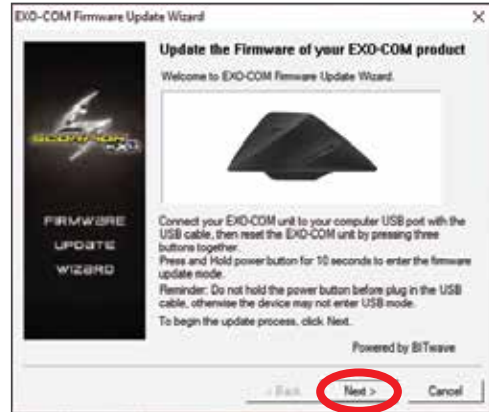


3. Start EXO-COM firmware Update Wizard

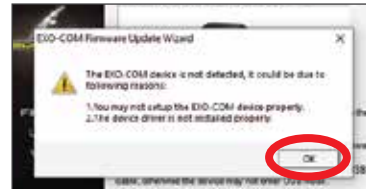

4. Click 'OK'


If you see the 'device not detected' alert, please repeat steps 1 & 2.

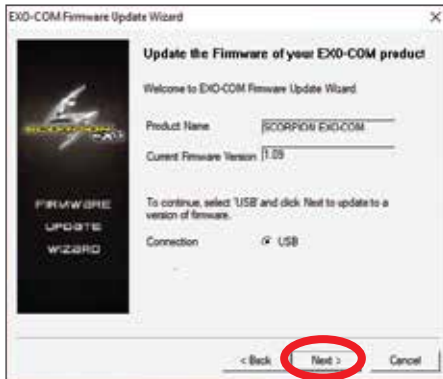

5. Click 'Next'




7. Click 'Finish'. Firmware update completed.

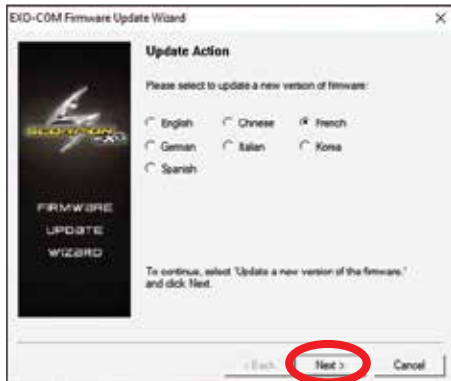


6. Check the language you want, and click 'Next'

## Universal Mount

- Not included in Smart 520 Air, Smart 930
- Included in Retail version

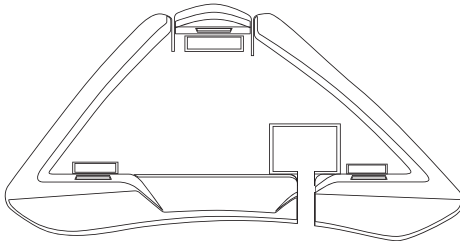

Universal mount for  
EXO-COM controller

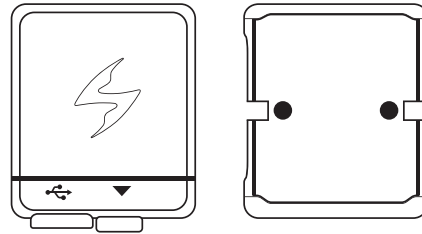


Universal mount for  
EXO-COM battery


- Universal mount kit is for EXO-COM users who have EXO HX1, EXO S1, EXO-Tech Carbon.
- We do not recommend attaching/detaching EXO-COM mount adhesives more than once.

## Universal Mount Assembly



### Universal mount assembly for EXO-COM controller

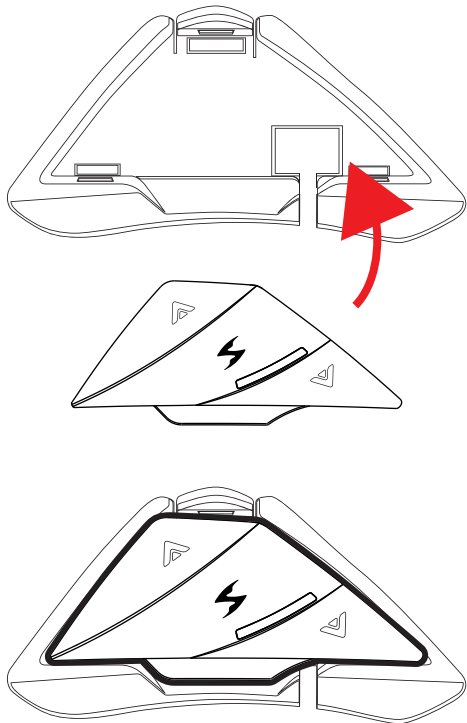

### Universal mount assembly for EXO-COM battery

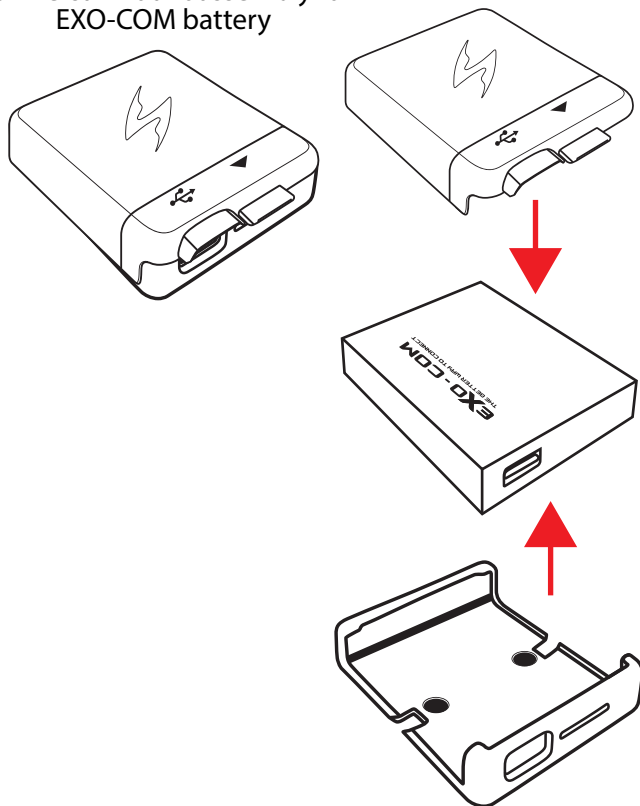




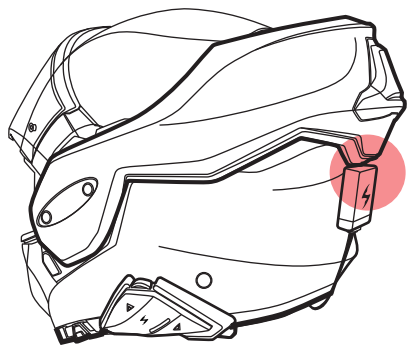

Please check if there is enough space between chin bar and battery housing

## Compatible Models


EXO-S1



EXO-HX1



EXO-TECH  
(Carbon)



## Notice

### BATTERY WARNING

The UCLEAR™ /ScorpionExo helmet communicator contains a rechargeable lithium ion polymer battery. To reduce risks of fire or burns, do not disassemble, crush, puncture, short external contacts or dispose in fire or water.

### CHARGING NOTICE

To reduce the risk of personal injury, electrical shock, fire or damage to equipments, please follow all the instructions below:

- Do not immerse the product, AC adaptor or speakers in water.
- Do not install, place or use the product near any source of heat for example: stove, radiator, oven, toaster, coffee maker or other apparatus that gives off heat.
- Always use the provided AC power adaptor and cable included in the package to charge the product. Use of any incorrect power supply to charge the product may cause permanent damage to the product and render the warranty void.

## Notice

### WARRANTY

Without prejudice of legal warranty, the product is covered under a 2 year warranty (control units), and 1 year warranty (accessories) by manufacturer from the date of purchase. Please produce the proof of purchase when you return the item to the supplier.

The warranty covers material and manufacturing defects only.

The warranty is voided by any unauthorized repairs, misuse, misapplication, tampering of the product, modifications, upgrading or results of any failures to follow the guidelines as set out in the product brochure by any of the actions specified in this brochure or anywhere in our technical publishing released to the public from time to time which would have voided the warranty.

Warranty does not cover data recovery and physical deterioration due to use, damages resulting from accidents, storage, loss or data loss or damage during repairs or transits. The sender will bear all transportation charges for functioning products but which were declared defective.

All product warranties for the product by UCLEAR™ /SCORPION EXO are limited to those mentioned in the product manual.

### LIMITATIONS OF WARRANTY

All product warranties for the product by UCLEAR™ /ScorpionExo are limited to those mentioned in the product manual.

### WAIVER AND DISCLAIMER

BITwave/Kido Sports, Co., Ltd. and all their representatives, agents, distributors, suppliers and resellers shall not be liable and will be held harmless from any and all litigation, claims, debts, demands, actions and liability which may arise, directly or indirectly, from operating or using the product for any damages, losses, distress, pain, suffering, discomfort, loss and injuries including bodily harm illness, strains, fractures, partial and/or total paralysis, death or other ailments that could cause serious disability either to any persons, or any parties whether the user or other third parties or their possessions, or to any goods, vehicles, properties, assets among others including your own suffered by any persons, organizations, or any third parties whether physical or otherwise and which may accrue to you in the future, to the fullest extent permitted by law as a result of the use, operation, malfunctioning, misuse, disposal or repairs of the product or any other reasons, conditions or circumstances or attempts to do so whether due negligence, omissions or otherwise of BITwave/Kido Sports, Co., Ltd. or any of their representatives, partners, agents, distributors, suppliers, resellers, designer, manufacturer or any others in its supply and distribution chain or any third parties involved.

### WAIVER AND DISCLAIMER (CON'T)

All risks from operating or usage of the product rest solely and entirely with the user of this product, the original purchaser or any third parties, who assumes full responsibility for all injuries, losses and/ or damages, whether caused in whole or in part by the negligence, omissions or other conduct of others, including that of BITwave/Kido Sports, Co., Ltd. and all their representatives, partners, agents, distributors, suppliers, resellers and all others in its supply and distribution chain either due to the designer's or manufacturer's negligence or omissions or any third parties involved. Always comply with the local law and traffic regulations. Where use of the product is not permitted or allowed by any laws and regulations including the traffic laws of your country, we warn you not to go against such restrictions.

You will bear the full responsibilities of any breaches of law and regulations.

You should not allow the operations or use of the product or any attempts to use it by any persons including yourself to compromise anyone's safety including your own or to cause harm to any vehicles, property, objects, livestock, inventories, assets and the like under any circumstances.

You or any users of the product are to take all necessary safety measures and precautions and to remain alert to all surrounding conditions.

### WAIVER AND DISCLAIMER (CON'T)

You are warned not to operate the product if you are not physically capable of doing so in a safe manner, if you have or will consume any alcohol or any mind-altering substance during its operation so that your alertness is compromised or if you have any medical conditions or needs that may compromise your abilities to do so in a safe manner. We warn you of the inherent, unforeseeable and unlimited risks and dangers in using the product while in traffic, including injury or illness, strains, fractures, partial and/or total paralysis, death or other ailments that could cause serious disability due to any causes. This product is only for use by persons eighteen (18) years of age and above who have understood the warnings, risks and the terms of use. You confirm that you have read this release of liability and fully understand its terms and that you have given up substantial rights by using or attempting to use the product.

### CORRECT DISPOSAL OF THIS PRODUCT

Do not dispose this product with other household wastes at the end of its working life. There is a separate collection system for used electronic products in accordance with legislation that requires proper treatment, recovery and recycling. Household users should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling. Business users should contact their suppliers and refer to the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.

### PRODUCT INFORMATION

BITwave/Kido Sports, Co., Ltd. and all their representatives, agents, distributors, suppliers or resellers shall not be held responsible for any consequences arising from any errors or omissions in the guide or resulting directly or indirectly from the use of the information herein. BITwave/Kido Sports, Co., Ltd. reserves the right to amend or improve the product design or user guide without any restrictions and without any obligation to notify users. All information here is accurate as of the date of printing.

Please check for latest versions of the product, firmware and accessories at [www.uclcardigital.com](http://www.uclcardigital.com).

### PERSONAL SAFETY

Do not open the seal of the hardware, tamper, repair or modify any parts.

Do not touch the product with metal objects or parts or chemical products.

Violation of the above will lead to potential fire hazards and mishaps.

Please contact the technical support or your local supplier if your product malfunctions.

## Notice

### TECHNICAL SUPPORT (NORTH AMERICA)

For technical or warranty support, please visit:  
[WWW.SCORPIONUSA.COM](http://WWW.SCORPIONUSA.COM) (USA)

### TECHNICAL SUPPORT (EUROPE)

[SCORPIONSPORTS.EU](http://SCORPIONSPORTS.EU) (EU)

### COPYRIGHTS

Copyright © 2018 BITwave Pte Ltd. All rights reserved.  
No part of this guide may be reproduced in any form or by any process whatsoever without prior written consent from BITwave Pte Ltd.

### LICENCES

The UCLEAR™ trademark and logo is exclusively owned by BITwave Pte Ltd.  
Any use of the mark by any other parties without prior written permission of BITwave Pte Ltd constitutes an infringement of legal rights.  
The Bluetooth™ trademark is owned by Bluetooth SIG and is used under license by BITwave Pte Ltd.



### IC SAR STATEMENT

This EUT is compliance with SAR for general population/uncontrolled exposure limits in IC RSS-102 and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528 and IEC 62209.

This equipment should be installed and operated with minimum distance 0 mm between the radiator and your head. This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.

Cet appareil est conforme aux limites d'exposition DAS incontrôlée pour la population générale de la norme CNR-102 d'Industrie Canada et a été testé en conformité avec les méthodes de mesure et procédures spécifiées dans IEEE 1528 et IEC 62209.

Cet équipement doit être installé et utilisé avec une distance minimale de 0 mm entre le radiateur et votre tête. Cet appareil et sa ou ses antennes ne doivent pas être co-localisés ou fonctionner en conjonction avec tout autre antenne ou transmetteur. été testé en conformité avec les méthodes de mesure et procédures spécifiées dans IEEE 1528 et IEC 62209. Cet équipement doit être installé et utilisé avec une distance minimale de 0 mm entre le radiateur et votre tête. Cet appareil et sa ou ses antennes ne doivent pas être co-localisés ou fonctionner en conjonction avec tout autre antenne ou transmetteur.

### FCC/SAR COMPLIANCE STATEMENT

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the Equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

### FCC/SAR COMPLIANCE STATEMENT

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End user must follow the specific operating instructions for satisfying RF exposure compliance. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. The portable device is designed to meet the requirements for exposure to radio waves established by the Federal Communications Commission (USA). These requirements set a SAR limit of 1.6 W/kg averaged over one gram of tissue. The highest SAR value reported under this standard during product certification for use when properly worn on the body is 0.919 W/kg.

Note: The manufacturer is not responsible for any radio or tv interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment

### CE SAR COMPLIANCE STATEMENT

This equipment complies with CE radiation exposure limits set forth for an uncontrolled environment. End user must follow the specific operating instructions for satisfying RF exposure compliance. These requirements set a SAR limit of 2.0 W/kg averaged over one gram of tissue. To meet the above requirement, the device should be placed at least 5mm away from human body in normal use condition.

## Notice

### WEEE (Waste Electrical and Electronic Equipment)

The symbol of a wheel bin with a cross on the product, literature, or packaging serves as a reminder that electrical and electronic products, batteries, and accumulators should be collected separately at the end of their useful life. This rule is applicable in the European Union and other areas where separate collection systems exist. To avoid causing damage to the environment or posing a risk to human health due to unregulated waste disposal, it is crucial not to dispose of these products as ordinary municipal waste. Instead, kindly deposit them at an authorized collection center for proper recycling.



Powered by

